

EASY-OFF Auto Power Board

Ensure your PC and AV equipment is turned off completely, not left in standby mode

Each year we have more and more computers, TV's, Hi Fi equipment, and other equipment around the home and office.


All this is great, but it pushes our energy costs up and up. The more of these types of products we have the more we leave equipment in standby mode.

The electricity used whilst in standby mode can add up to significant amounts across weeks, months, and years. Often we just leave our items switched on or in standby mode, this is costing us a lot of money and needlessly using energy.

In addition to this, leaving our equipment turned on shortens the life of the product, and also increases the fire risks etc.

The Watts Clever range of Standby Control products helps people and companies to ensure that they turn all relevant equipment fully off.

Our products ensure that this becomes a simple operation and something that will be done automatically, or with the minimum of thought.

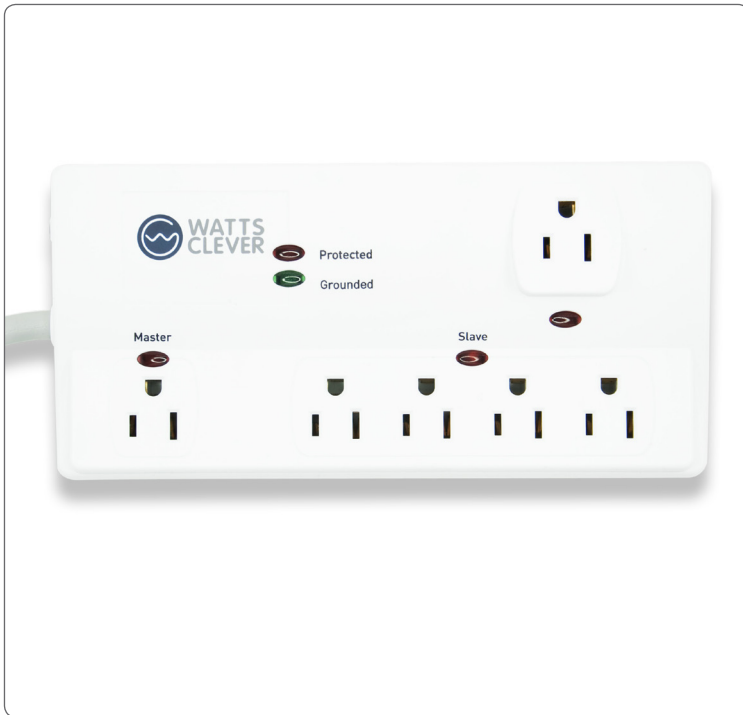

Main specifications

- Dimension: 250 (L) x 92 (W) x 42 (H) mm (not include the power cord)
- Power rating 15A, 125V
- 1,875 watts maximum load
- 1 main control socket, 4 auto ON / OFF sockets
- 1 Always on sockets
- 10A resettable circuit breaker
- Lighted rocket switch for normal / auto function
- 3 LED function lights for power, surge protection and normal or automatic operation
- Flame resistance housing
- 1.8 metre power cord, 3G 1.25mm
- 2,160 joules 3 line surge protection
- Clamping voltage 775V / 800V
- Max spike voltage 6Kw
- 13,000A maximum current
- Response time less than 1 nanosecond
- Noise filtration to 40db
- Frequency range 150Khz to 100 Mhz
- UL Certified
- Less than 1W power in standby mode



How it works

The standby control unit will automatically cut off the electricity to all your connected peripheral equipment.

For you PC system this would be your scanner, printer, speakers, table lamp etc. For your AV equipment this would be the CD player, amplifier, DVD player etc.

The main control equipment (PC or TV for example) is plugged into the control socket, your peripheral equipment is connected to the auto sockets.

When the main equipment is turned off the unit senses the drop in power levels and will automatically cut the power to the auto sockets. When the main equipment is turned on again the process is reversed.

The unit also has 1 always on socket for leaving essential equipment turned on



Product Code: ES-USA1001

www.wattsclever.com

FC CE RoHS  
Made in China